

S25

Insbesondere geeignet
für Recycling.



**Erhältlich in 4 VERSCHIEDENEN
BELÄGEN:**

- **ABRIEBBESTÄNDIG**
- **ÖLBESTÄNDIG**
- **FLAT**
- **FLAT OIL**


Particulièrement adaptée au secteur
du recyclage.



**Disponible en DIFFÉRENTES
COUVERTURES au choix entre:**

- **ANTI-ABRASIVE**
- **ANTI-HUILE**
- **PLAT**
- **FLAT OIL**

L440

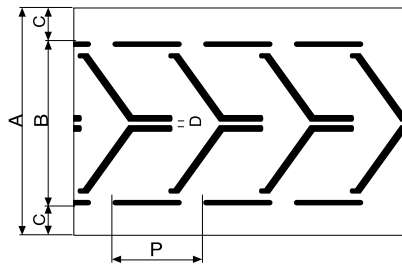

A	600	650
B	440	440
C	80	105
D	15	15
P	250	250




**PROFIL
LATTE
25 mm**



EP400/3


315 mm

L540

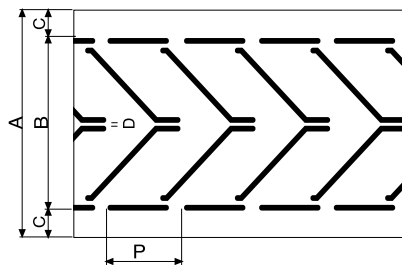


A	650	800
B	540	540
C	55	130
D	15	15
P	250	250

L750

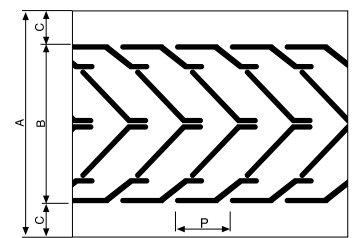


A	1000	1200
B	720	720
C	140	140
D	15	15
P	250	250

L830



A	1000	1200
B	830	830
C	85	185
D	15	15
P	250	250

L1120



A	1200	1400
B	1120	1120
C	40	140
D	15	15
P	250	250