




PVC



- Apta para el contacto con productos alimenticios para los que están previstos los simulantes A, B, C D2 y E*.
Suitable for the contact with food with the presence of A-B-C-D2 and E simulants.

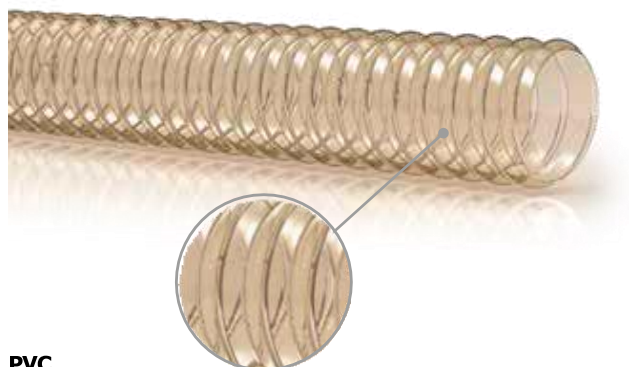

USO APPLICATIONS

Adecuada para la aspiración de polvos abrasivos en general.
Adecuada para el contacto con alimentos acuosos, ácidos y alcohólicos (hasta el 20%), aceitosos y/o grasos y secos para los que se proporcionan los simulantes A, B, C, D2 y E*. Especialmente indicada para talleres de carrocería, la industria maderera, cerámica y farmacéutica.

Suitable for suction of abrasive dust and for contact with food with a presence of oils and fats according to EU Regulation 10/2011 simulants A, B, C, D2 and E*. Product recommended in panel beaters, wood industry, ceramic industry and in pharmaceutical industry.

ESTRUCTURA BODY

A	Material	Poliuretano. Polyurethane.
B	Refuerzos Reinforcement	Espiral de acero armónico cobreado y pared reforzada. Galvanized steel copper spiral wire.
C	Capa exterior Cover	Corrugada. Outside corrugated.
	Superficie Surface	Transparente con espiral cobreado. Transparent, copper plated steel spiral.

ABRAZADERAS Y COLLARES DE APRIETE RECOMENDADOS RECOMMENDED CLAMP/COLLAR

STF - Abrazaderas de tornillo Hose clamps with screw (pag. 204-207)

STC - Abrazaderas con perno Hose clamps with bolt (pag. 208-210)

SSS - Abrazadera de salto espiral Spiral piepe clamp (pag. 219)



mm	mm	bar	bar	bar	gr/mt	mm	m
25	-	1	-	0,3	180	25	20
30	-	1	-	0,3	200	30	20
32	-	1	-	0,3	240	32	20
38	-	1	-	0,3	250	38	20
40	-	1	-	0,3	270	40	20
45	-	1	-	0,3	280	45	20
50	-	1	-	0,3	330	50	20
60	-	1	-	0,3	440	60	20
63	-	1	-	0,3	460	63	20
70	-	1	-	0,25	490	70	20
75	-	1	-	0,25	530	75	20
80	-	1	-	0,25	500	80	20
90	-	1	-	0,25	680	90	20
100	-	1	-	0,25	700	100	20
110	-	1	-	0,25	720	110	20
120	-	1	-	0,25	1000	120	20
127	-	0,5	-	0,25	1100	127	20
130	-	0,5	-	0,12	1100	130	20
140	-	0,5	-	0,12	1150	140	20
152	-	0,5	-	0,12	1250	152	20
160	-	0,5	-	0,1	1280	160	20
180	-	0,5	-	0,05	1350	180	20
203	-	0,5	-	0,05	1500	203	20
254	-	0,5	-	0,03	2300	254	10
305	-	0,5	-	0,03	3200	305	10

NORMAS NORMS:
ISO 1307

COMPRESIBILIDAD AXIAL
AXIAL COMPRESSIBILITY:
8:1

DECLARACIÓN DE CONFORMIDAD DISPONIBLE
DECLARATION OF COMPLIANCE IS AVAILABLE

-40°C / +90°C
-40°F / +194°F

* CONTACTO REPETIDO MÁXIMO DE 2 HORAS A TEMPERATURA MÁXIMA DE 70°C MAX 70°C FOR 2 HOURS