




L/RR

PROFILO ROMBI 20x20 con sottostrato (H 2000 mm)
PULLEY LAGGING RHOMBOIDAL PROFILE 20x20 with
bonding layer (H 2000 mm)

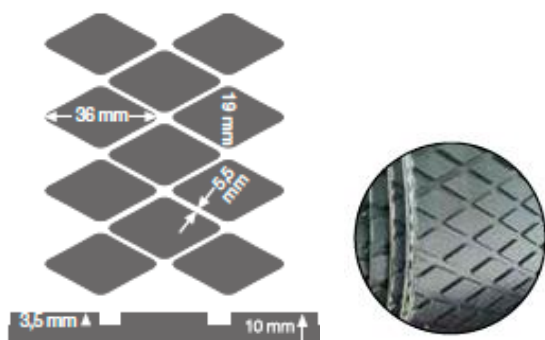

IMPIEGO APPLICATIONS

Gomma antiabrasiva utilizzata comunemente come rivestimento di tamburi metallici nel settore dei nastri trasportatori. Viene fornita con un lato in gomma cruda per la vulcanizzazione a freddo tramite soluzione specifica, la quale conferisce un eccezionale attacco gomma-metallo.

Superficie: Un lato profilo rombi 20x20 mm/Altro lato con crudo

Anti-abrasive rubber commonly used as a coating on metal drums for the conveyor belt sector. It has one side with raw rubber for cold vulcanization using a specific solution which gives an exceptional rubber-metal attachment.

Surface: 20x20 mm rhomboidal profile/Bonding layer.



STOCK



mm



m

8

✓

2,0

15

10

✓

2,0

15

12

✓

2,0

15



DUREZZA
HARDNESS



CARICO
ROTTURA
TENSILE STRENGTH



ALLUNGAMENTO
ELONGATION



PERDITA DI ABRASIONE
ABRASION LOSS

Norme /
Norms:
ASTM
D2240

60 Shore
A ± 5

Norme /
Norms:
ASTM
D412

130 kg/cm²

Norme /
Norms:
ASTM
D412

400%

Norme /
Norms:
ISO 4649

<130 mm³



1,2 gr/cm³



-25°C / +80°C
-13°F / +176°F