




### IMPIEGO APPLICATIONS

Used on firefighting offshore equipment fire resistant sea water delivery hose. Thanks to the inclusion of multiple vermiculite fibre layers, and thick flame-resistant cover, this hose is suitable for use on boats in fuel systems and tank venting and exhaust systems for the fireproof properties and the NBR liner compound, resistant to hydrocarbons.

SPECIFICATION: ISO 15540:2016

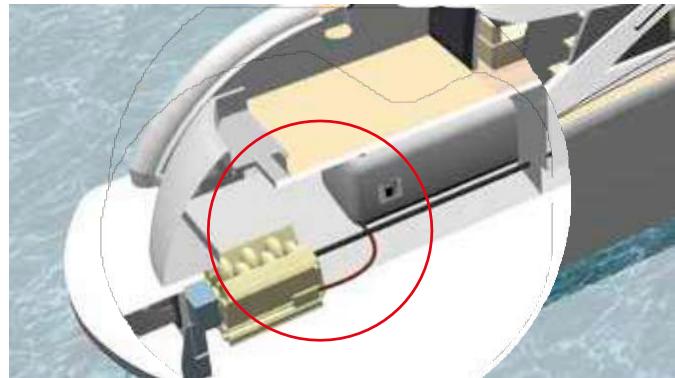

### STRUTTURA BODY

**A**

**Sottostrato Tube** Black smooth NBR rubber, suitable for fuel and high aromatics, diesel or gasoline, excellent compatibility with sea water.

**B**

**Inserti Reinforcement** High strength reinforcement layers, including multiple heat insulation vermiculite plies. Steel wire reinforcement.

**C**

**Copertura Cover** Black color CR rubber cover, fire resistant, self extinguish, resistant to sea water, fuel and oils.

**Superficie Surface**

Corrugated.

mm	bar	mm	m
25	10	100	20
30	10	120	20
35	10	140	20
40	10	160	20
51	10	204	20
60	10	240	20
63,5	10	254	20
76	10	304	20
80	10	320	20
90	10	360	20
102	10	408	20
127	10	508	20
152	10	608	20
203	10	812	20



#### NORMS:

ISO 15540:2016

ISO 1307

#### SAFETY FACTOR:

4:1



-35°C / +100°C  
-31°F / +212°F