




IMPIEGO APPLICATIONS

Industria in genere
Macchine agricole
Edilizia
Ciclomotori
Automotive

Industry in general
Agriculture machine
Construction
Motorcycles
Automotive

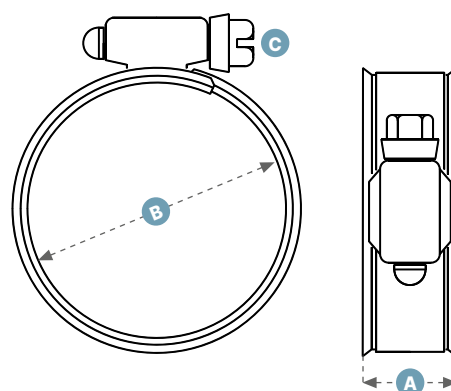

DESCRIZIONE DESCRIPTION

Le fascette con anello interno SAE tipo F WDB sono particolarmente indicate per i circuiti di raffreddamento. L'anello interno garantisce una tenuta sicura su tubi in materiali morbidi creando un effetto oring tra fascetta, tubo e portagomma.

For air to air and coolant applications.
The inner shield provides superb sealing characteristics and is safe for all soft hoses.
It can also be found in the marine, agriculture, construction and off-highway markets.



MATERIALE MATERIAL

Banda Band	Acciaio inossidabile Stainless steel AISI 304
Cassetto Housing	Acciaio inossidabile Stainless steel SERIES 300
Vite Screw	Acciaio inossidabile Stainless steel SERIES 300

		LARG. NASTRO BAND WIDTH	DIAM. DIAM.	SPESSORE THICKNESS	COPPIA DI SERRAGGIO RACCOMANDATA RECOMMENDED TIGHTENING TORQUE (PAG. 221)	SCATOLE BOX
		A mm	B mm	C mm	Nm	pz/nrm
16 mm	WDB015034	16,51	15,9-34,9	8	3,4-4,5	400
	WDB017041	16,51	17,5-41,4	8	3,4-4,5	400
	WDB023047	16,51	23,8-47,6	8	3,4-4,5	400
	WDB030054	16,51	30,2-54,0	8	3,4-4,5	400
	WDB036060	16,51	36,5-60,3	8	3,4-4,5	300
	WDB042066	16,51	42,9-66,7	8	3,4-4,5	300
	WDB049073	16,51	49,2-73,0	8	3,4-4,5	300
	WDB055079	16,51	55,6-79,4	8	3,4-4,5	300
	WDB061085	16,51	61,9-85,7	8	3,4-4,5	300
	WDB068092	16,51	68,3-92,1	8	3,4-4,5	300
	WDB074098	16,51	74,6-98,4	8	3,4-4,5	200
	WDB087111	16,51	87,3-111,1	8	3,4-4,5	200
	WDB100123	16,51	100,0-123,8	8	3,4-4,5	200
	WDB112136	16,51	112,7-136,5	8	3,4-4,5	200